

Digital display timer series

《EW-982G-M1Description》

Product Function

Firstly, thanks for using our instrument. This product is used for time control. When the timer starting after the countdown begins, when the countdown reaches "0", stop the countdown, a load relay, and starts the buzzer, then press any key to stop the sound.


Setting time numerical value by panel board button, it will autosave after power off.

Technical Specifications


- 1、Operating voltage: 220V/AC ±10% 50HZ/60HZ
- 2、Output Load: 10A/220V/AC
- 3、Power Consumption: ≤3W
- 4、Working enviroment: -10℃~50℃ RH≤90%
- 5、Control range: 0~999 minute
- 6、Overall Dimension: 76 (W) ×35 (H) ×76 (D) mm
- 7、Hole size: 71 (W) ×29 (H) mm

Note: When set to 0 minutes, according to the load the key to open the relay long pull. This time to stop the load relay, press the key to open the green light goes out

Panel Diagram

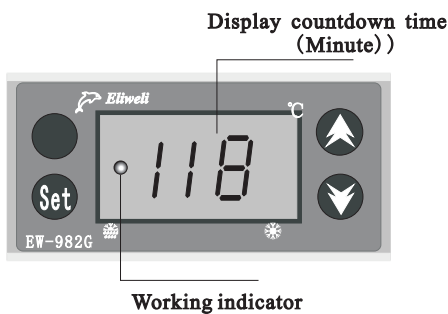

Diagram

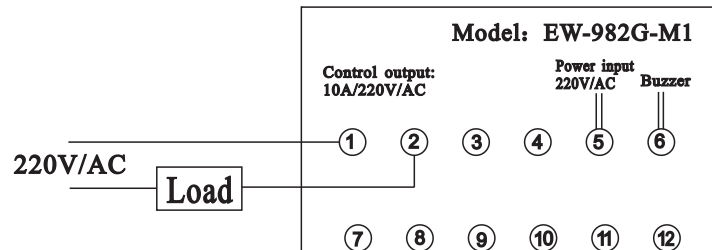

Operating instructions

Thermostat panel has four buttons to set and related operations.

Ⓢ "set" Key ● "Switch" Key

▲ "up", each click, means time to add a minute ▼ "down", each click, means time reduced 1 minute

1、When the temperature control digital tube shines, it has switched on.

2、Press ● until the green indicator light flashes, the meter starts to count down. Countdown to 000 when the load relay pull-in audible alarm buzzer, the green indicator light, press any key to stop the sound. If you want to stop working during working hours, the key to open the can let go when the green light goes out.

3、Press Ⓢ Screen will display the time parameters in a factory. Then press ▲ or ▼ It can re-enter the required settings, modify the parameters automatically after 3 seconds, the new set parameter memory.

Note: When timer is started, press ● when the green light goes out it stop working, timer will be reset, press ● again to a green light flashes ,let go and re-start e timer.