


REV	Description	Date
A00	First Issue	2007-JUN-06

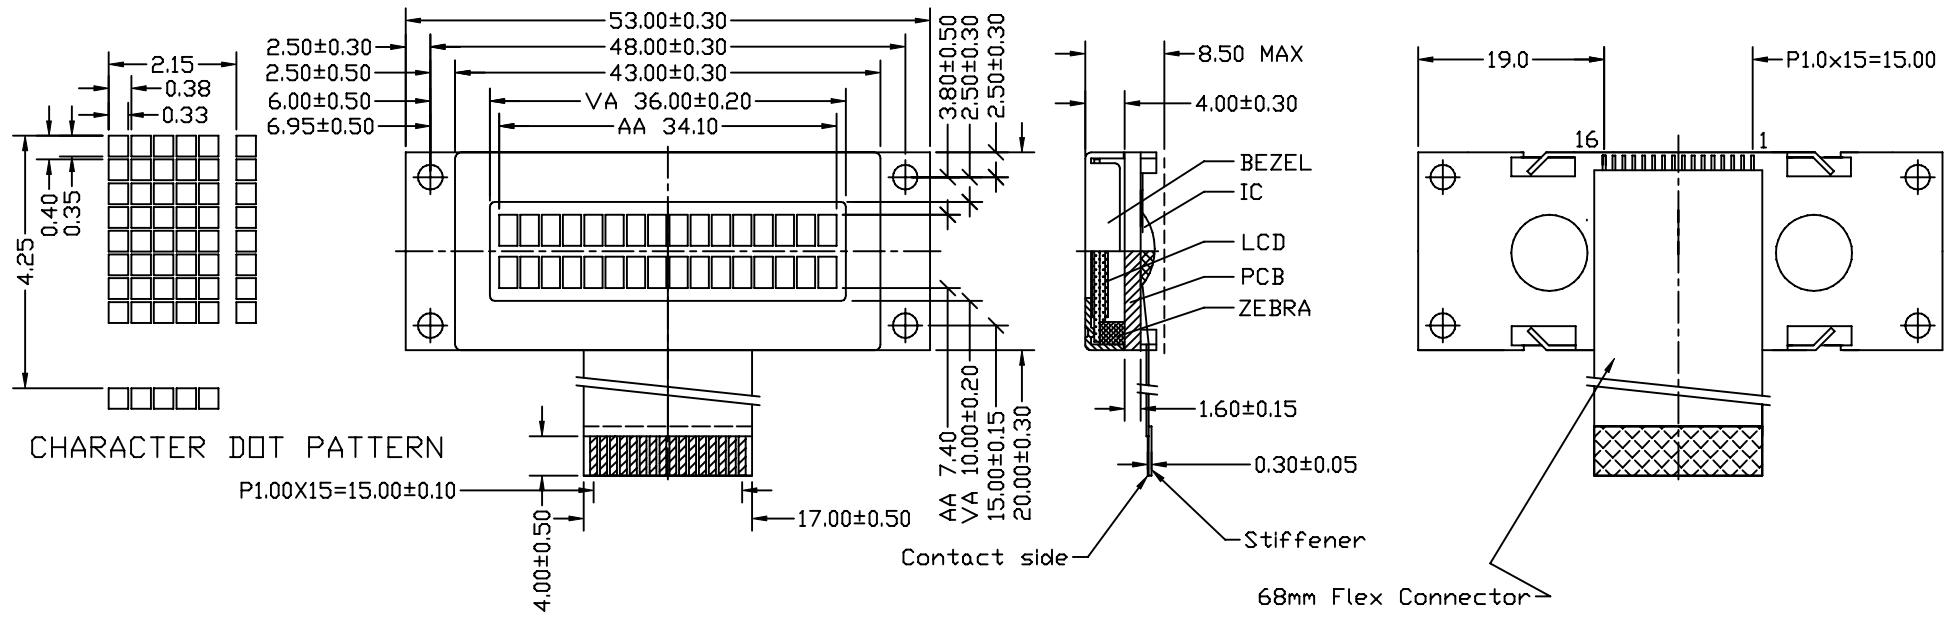

PIN ASSIGNMENT

16 PIN CONNECTION	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	VSS	VDD	V ₀	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

SPECIFICATIONS:

- 1)STN/+VE/Y-G/TRANSFLECTIVE MODE
- 2)1/16 DUTY, 1/5 BIAS, VOP=4.5V
- 3)VIEWING ANGLE = 6 O'CLOCK
- 4)OP.TEMP.=0°C TO +50°C
- 5)ST.TEMP.=-10°C TO +60°C
- 6)W/ Y-G LED BACKLIGHT, 20mA@4.05V

Description: **MECHANICAL SPECIFICATIONS**

Scale: _____

Sheet : 1 of 1

Unspecified Tol. ±0.3 Unit mm

Approvals _____ Date _____

Draw: _____

Check: _____

Approve: _____

TRI-T COMPANY LIMITED

Project Number: **TMBC16263ASP-29**

Item Number: _____

Do Not Scale This Drawing

Projection: