



REV	Description	Date
A00	First Issue	2003-AUG-6

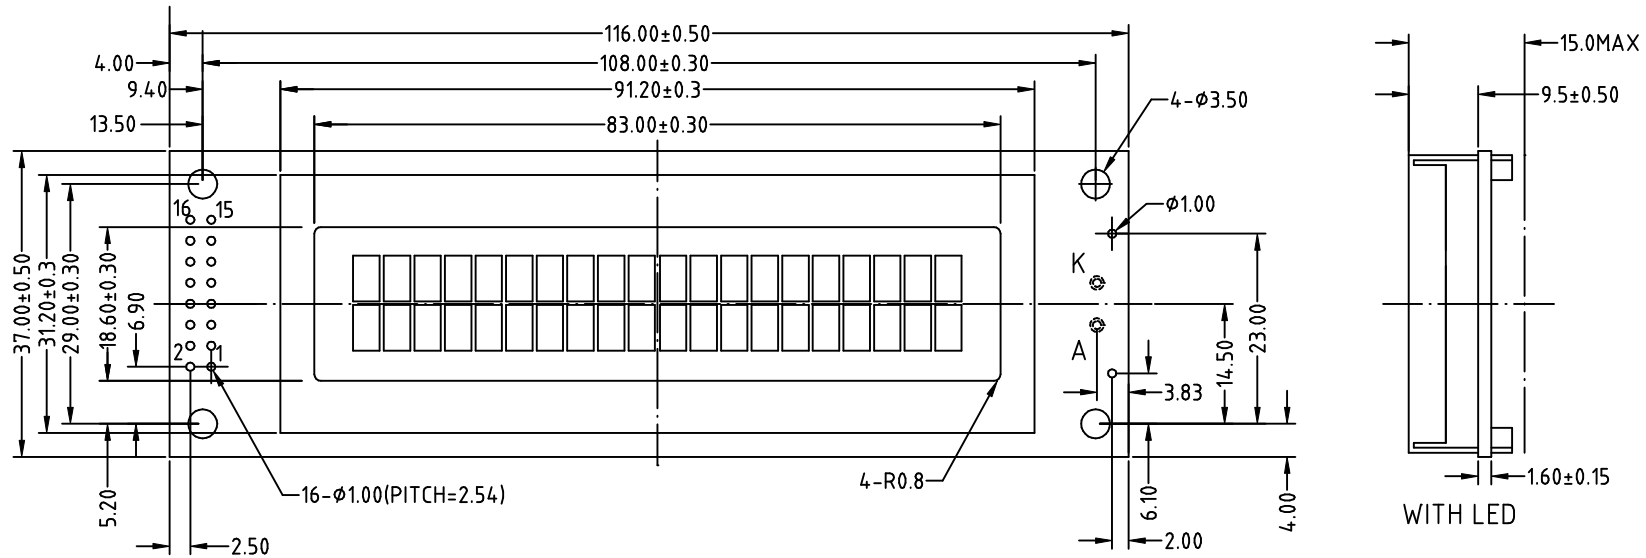


PIN CONNECTION	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15(A)	16(K)
	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>O</sub>	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED(+)	LED(-)

Specification:

- 1) STN/+VE/Y-G/Transflective Mode
- 2) 1/16 duty, 1/5 bias, VLCD = 4.5V - 5.0V
- 3) Viewing Angle = 6 o'clock
- 4) Operating Temp. = 0 °C - +50 °C  
Storage Temp. = -10 °C - +60 °C
- 5) With Y-G LED Backlight, 4.05V@14.0mA

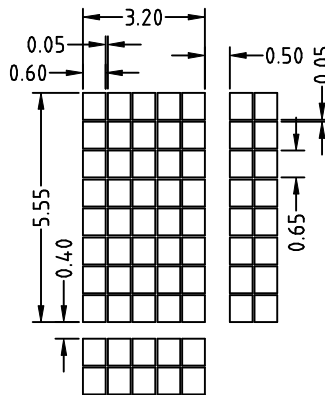

Description:		MECHANICAL SPECIFICATIONS	
Scale:		 <b>TRI-T COMPANY LIMITED</b>	
Sheet : 1 of 1			
Unspecified Tol. ±0.3	Unit mm	Project Number	Item Number
Approvals	Date	TMBC20265ASP-16	
Draw:		Do Not Scale This Drawing	
Check:			
Approve:			

